

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
15 May 2003 (15.05.2003)

PCT

(10) International Publication Number
WO 03/040209 A1

- (51) International Patent Classification⁷: **C08G 65/00**, 65/336, C09D 171/02, C03C 17/30, C08J 7/04
- (21) International Application Number: **PCT/US02/27331**
- (22) International Filing Date: **27 August 2002 (27.08.2002)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
10/010,144 8 November 2001 (08.11.2001) **US**
- (71) Applicant: **3M INNOVATIVE PROPERTIES COMPANY** [US/US]; 3M Center, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (72) Inventors: **MOORE, George G.I.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **DAMS, Rudolf J.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **FIEUWS, Franceska M.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US). **PIESSENS, Guido P.**; Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (74) Agents: **KOKKO, Kent, S. et al.**; Office of Intellectual Property Counsel, Post Office Box 33427, Saint Paul, MN 55133-3427 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK (utility model), SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Declarations under Rule 4.17:**
- as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations
 - as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations
- Published:**
- with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

WO 03/040209 A1

(54) Title: COATING COMPOSITION COMPRISING FLUORO-CHEMICAL POLYETHER SILANE POLYCONDENSATES AND USE THEREOF

(57) Abstract: A composition comprising the condensation product of a least one fluorochemical polyether silane compound having a polyfluoropolyether segment and at least two silane groups $\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x$, wherein R^1 represents an alkyl group, Y represents a hydrolysable group and x is 0 or 1 per molecule, with one or more non-fluorinated compounds having at least two hydrolysable groups per molecule, and the reaction product thereof, is disclosed. The composition provides durable water, oil and stain repellence to a substrate.

**COATING COMPOSITION COMPRISING FLUOROCHEMICAL POLYETHER
SILANE POLYCONDENSATE AND USE THEREOF**

5 The present invention relates to a composition comprising the condensation product of at least one fluorochemical polyether silane compound having a polyfluoropolyether segment and at least two hydrolysable silane groups per molecule with one or more non-fluorinated compounds having at least two hydrolysable groups per molecule. The present invention also relates to the use of the composition for providing
10 durable repellency to water, oil and stain to a substrate.

 In the past, various efforts have been made to provide repellent properties to a substrate. For example, U.S. 4,687,707 (=EP-A-0 166 363) describes a low reflectance, transparent material having anti-soiling properties, which comprises a transparent
15 substrate having a coating comprising a thin layer of a condensation product of a fluorine containing silicon compound having a polyfluorinated or perfluorinated carbon chain.

 WO 99/03941 relates to a coating material comprising condensates of at least one compound (A) of the general formula R_aMZ_b ($a = 0$ to 3 ; $b = 1$ to 4 ; $a + b = 3, 4$), and at least one compound (B) of the general formula R'_xMZ_y ($x = 1$ to 3 ; $y = 1$ to 3 ; $x + y = 3, 4$), wherein R is a non-hydrolysable organic group, M is an element selected from the
20 main groups III to V or from the subgroups II to IV of the periodic table of elements, Z is a hydrolysable group, and at least one R' contains a perfluoropolyether structure separated from M by at least two atoms, and at least one R is not equal to at least one R'. The composition is used to provide oleophobic properties to substrates, such as porous polymers.

25 U.S. 5,739,369 (=EP-A-0 738 771) relates to a water-soluble surface treating agent comprising the reaction product of (A) a fluoroalkyl group-containing alkoxysilane with (B) an amino-group-containing alkoxysilane and optionally further with (C) an alkyl group-containing alkoxysilane. The agent is diluted with water to form a solution for treating glass and other substrates to impart thereto properties, such as water repellency.

30 US-A-5,919,886 relates to a fluorine-containing organo-silicon compound useful for obtaining elastomers and to room temperature curable silicon compositions containing the same compound.

U.S. 5,306,758 (=EP-A-0 433 070) describes fluorocarbon based, curable, crosslinkable compositions and coatings prepared therefrom that can be used to form low-surface energy release liners.

U.S. 5,922,787 (=EP-0 797 111) relates to a composition containing an alkoxy-silane compound having a perfluoropolyether group. The composition may be used for forming an anti-fouling film.

However, our findings indicate that while some of the previously known surface coatings may be capable of providing acceptable levels of initial repellent properties, a loss of repellency is often encountered due to abrasion of the coating. Also, if non-fluorine containing components are additionally employed in the coating composition, a step-wise hydrolysis is often required (see for example US5644014), wherein in a first step a precondensation of the non-fluorinated silane is carried out and only subsequently the fluorinated silane compound may be added. If a one-step hydrolysis is carried out, often phase separation occurs thereby leading to non-homogenous coatings having insufficient repellent properties.

Accordingly, it is desirable to provide a coating composition capable of providing a highly durable water, oil and/or stain repellent coating on a substrate. In particular, it is desirable to provide a durable coating wherein the initial, repellent properties are substantially maintained, even under abrading conditions. Further, the coating compositions preferably can be applied and used in an environmental friendly way and can be produced in a reliable, convenient and cost effective way.

Summary of the Invention

In one aspect, the present invention provides a composition comprising the reaction product obtainable after a substantially complete condensation reaction of (A) one or more fluorochemical polyether silane compound(s) having a polyfluoropolyether segment and at least two silane groups $-\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x$ per molecule, wherein R^1 represents an alkyl group, Y represents a hydrolysable group and x is 0 or 1; and (B) a substantial amount of one or more non-fluorinated compounds of an element M selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn and having at least two hydrolysable groups per molecule. By the term "substantially complete condensation reaction" is meant that the reaction is either complete or at least 80% of the hydrolysable

groups in the mixture have disappeared, preferably at least 90%. Completion of the reaction can be monitored through the use of infrared spectroscopy and C^{13} -NMR.

In a further aspect, the present invention provides a method for preparation of the condensation product. In a still further aspect, the present invention also provides a method for treating a substrate, comprising the step of applying to the substrate the composition as defined above. The fluorochemical compositions can be used to treat substrates and are capable of rendering such substrates oil and water repellent and/or to provide stain repellency thereto.

The compositions are generally effective at low levels of application and have good durability. The compositions are particularly useful for rendering substrates such as ceramics, metal, polymeric substrates and glass repellent to water and/or oil.

In one embodiment, a homogeneous reaction product mixture can be obtained by simply mixing the components in a suitable solvent, in the presence of reagent water, and optionally of a catalyst. There is no need for a two-step reaction; where in a first step a precondensate of compound (B) is formed and in a second step, the fluorochemical polyether disilane (A) is added. Accordingly, the reaction product of the invention can be produced in an easy and reliable way.

By the term "homogeneous mixture" in connection with the present invention is meant that the composition is stable, for at least 24 hours, preferably 1 month, at room temperature. Some haziness may occur, however without substantial precipitation or phase separation occurring.

The term "hydrolysable group" in connection with the present invention refers to a group which either is directly capable of undergoing condensation reactions under appropriate conditions or which is capable of hydrolyzing under appropriate conditions, thereby yielding a compound, which is capable of undergoing condensation reactions. Appropriate conditions include acidic or basic aqueous conditions, optionally in the presence of a condensation catalyst.

Accordingly, the term "non-hydrolysable group" as used in the present invention refers to a group not capable of either directly undergoing condensation reactions under appropriate conditions or of hydrolyzing under the conditions listed above for hydrolyzing the hydrolyzable groups.

The term "substantial amount" of a compound as used herein refers to an amount of a compound greater than a catalytic amount of that compound necessary for promoting a certain reaction (e.g., condensation reactions). Accordingly, a composition comprising a substantial amount of that compound generally allows the compound to act as a reactant such that the resulting product is formed of at least part of that compound.

Detailed Description

Component (A) comprises at least one fluorochemical polyether silane compound having a polyfluoropolyether segment and at least two silane groups $-\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x$ per molecule, wherein R^1 represents an alkyl group (for example a C_1 - C_8 , preferably C_1 - C_4 primary or secondary alkyl group), Y represents a hydrolysable group and x is 0 or 1.

Preferably, component (A) is a fluorochemical polyether silane compound according to formula (I)




wherein R_f represents a multivalent polyfluoropolyether segment, Q represents an organic divalent linking group, R^1 represents an alkyl group (preferably containing 1 to 8, more preferably 1 to 4 carbon atoms), Y represents a hydrolysable group; R represents hydrogen or an alkyl group of 1 to 4 carbon atoms and the R groups may be the same or different, x is 0 or 1 and z is 2, 3 or 4. Preferably both R groups are hydrogens.

The hydrolysable groups Y may be the same or different and are generally capable of hydrolyzing under appropriate conditions, for example under acidic or basic aqueous conditions, such that the fluorochemical silane compound can then undergo condensation reactions. Preferably, the hydrolysable groups upon hydrolysis yield groups capable of undergoing condensation reactions, such as silanol groups.


Examples of hydrolysable groups include halide groups, such as chlorine, bromine, iodine or fluorine, alkoxy groups $-\text{OR}'$ (wherein R' represents a lower alkyl group, preferably containing 1 to 6, more preferably 1 to 4 carbon atoms and which may optionally be substituted by one or more halogen atoms), acyloxy groups $-\text{O}(\text{CO})-\text{R}''$ (wherein R'' represents a lower alkyl group, preferably containing 1 to 6, more preferably 1 to 4 carbon atoms, which may be optionally substituted by one or more halogen atoms), aryloxy groups $-\text{OR}'''$ (wherein R''' represents an aryl moiety, preferably containing 6 to 12, more preferably containing 6 to 10 carbon atoms, which may be optionally substituted

by one or more substituents independently selected from halogens, and C₁-C₄ alkyl groups which may optionally be substituted by one or more halogen atoms). In the above formulae R', R'', and R''' may include branched structures.

Suitable hydrolysable groups also include polyoxyalkylene groups of the formula



wherein A is a divalent hydrophilic group (a) having the formula



wherein q is a number having a value of 1 to 40, preferably 2 to 10, R⁴ is hydrogen or methyl, and at least 70% of R⁴ is hydrogen, and R³ independently is hydrogen or a lower alkyl group having 1 to 4 carbon atoms, such as disclosed in U.S. Pat. No. 5,274,159, incorporated herein by reference.

Specific examples of hydrolysable groups include methoxy, ethoxy and propoxy groups, chlorine and an acetoxy group. Particularly preferred hydrolysable groups include C₁-C₄ alkoxy groups, such as methoxy and ethoxy groups.

15 The divalent polyfluoropolyether group R_f in the above formula (I), representing the fluorinated polyether silane, can include linear, branched, and/or cyclic structures, that may be saturated or unsaturated, and containing one or more catenary oxygen atoms (i.e. one or more non-adjacent -CF₂- groups may be replaced by -O- groups). R_f preferably is a perfluorinated group (i.e., all C-H bonds are replaced by C-F bonds). More preferably, it includes perfluorinated repeating units selected from the group of -(C_nF_{2n}O)-, -(CF(Z)O)-, -(CF(Z)C_nF_{2n}O)-, -(C_nF_{2n}CF(Z)O)-, -(CF₂CF(Z)O)-, and combinations thereof, wherein the repeating units generally may be randomly, blocky or alternating arranged, and optionally can include -(C_nF_{2n})- and -(CF(Z))- units and wherein n is a number from 1 to 12 inclusive, preferably from 1 to 4 inclusive. R_f may also comprise cyclic perfluoro groups, for example cyclic -C₆F₁₀- groups.

25 In these repeating units Z is a perfluoroalkyl group, an oxygen-containing perfluoroalkyl group, a perfluoroalkoxy group, or an oxygen-substituted perfluoroalkoxy group, all of which can be linear, branched, or cyclic, and preferably have about 1 to about 9 carbon atoms and 0 to about 4 oxygen atoms. Examples of polyfluoropolyethers containing polymeric moieties made of these repeating units are disclosed in U.S. Pat. No. 5,306,758 (Pellerite).

In one embodiment, approximate average structures for a divalent perfluoropolyether group include $-\text{CF}_2\text{O}(\text{CF}_2\text{O})_m(\text{C}_2\text{F}_4\text{O})_p\text{CF}_2-$, wherein an average value for m is 0 to about 50 and an average value for p is 0 to about 50, with the proviso that both m and p are not simultaneously 0, $-\text{CF}(\text{CF}_3)-(\text{OCF}_2\text{CF}(\text{CF}_3))_p\text{O}-\text{R}_f'-$
 5 $\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_p\text{CF}(\text{CF}_3)-$, $-\text{CF}_2\text{O}(\text{C}_2\text{F}_4\text{O})_p\text{CF}_2-$, and $-(\text{CF}_2)_3\text{O}(\text{C}_4\text{F}_8\text{O})_p(\text{CF}_2)_3-$, wherein R_f' is a divalent, perfluoroalkylene group containing one or more carbons and optionally catenary O or N. The values of m and p in these approximate average structures can vary. Preferably, an average value of m is within a range of about 1 to about 50, and an average value of p is within a range of about 3 to about 40. As these are polymeric materials, such
 10 compounds exist as mixtures upon synthesis, which are suitable for use. The repeat units generally may be positioned in a random, blocked or alternating arrangement.

As synthesized, these structures typically include a mixture of polymeric units. The approximate average structure is the approximate average of the mixture of structures. Further, the distribution of perfluorinated repeating units may be regular or random.

15 The divalent linking group Q may be the same or different and can include linear, branched, or cyclic structures, that may be saturated or unsaturated, and preferably contains 1 to 15 atoms. The group Q can contain one or more heteroatoms (e.g., oxygen, nitrogen, or sulfur) and/or one or more functional groups (e.g., carbonyl, amide, urethane or sulfonamide). It can also be substituted with one or more halogen atoms (preferably,
 20 fluorine atoms), although this is less desirable, as this might lead to instability of the compound. The divalent linking group Q preferably is substantially stable against hydrolysis.

For example, Q may be a saturated or unsaturated hydrocarbon group typically including 1 to 15 carbon atoms. Preferably Q is a linear hydrocarbon group preferably
 25 containing 1 to 10 carbon atoms, and optionally containing 1 to 4 heteroatoms and/or 1 to 4 functional groups, and more preferably, containing at least one functional group.


Suitable linking groups Q include the following structures in addition to a covalent bond. For the purposes of this list, each k is independently an integer from 0 to about 20, k' is independently an integer from 0 to 20, preferably from 2 to 12 and most preferably
 30 from 2 to 6, R_1' is hydrogen, phenyl, or alkyl of 1 to about 4 carbon atoms, and R_2' is alkyl of 1 to about 20 carbon atoms

$-\text{SO}_2\text{NR}_1'(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$	$-\text{CONR}_1'(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$
$-(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$	$-\text{CH}_2\text{CH}(\text{OR}_2')\text{CH}_2\text{O}(\text{O})\text{C}-$
$-(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$	$-(\text{CH}_2)_k\text{SC}(\text{O})-$
$-(\text{CH}_2)_k\text{O}(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$	$-(\text{CH}_2)_k\text{S}(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$
$-(\text{CH}_2)_k\text{SO}_2(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$	$-(\text{CH}_2)_k\text{S}(\text{CH}_2)_k\text{OC}(\text{O})-$
$-(\text{CH}_2)_k\text{SO}_2\text{NR}_1'(\text{CH}_2)_k\text{O}(\text{O})\text{C}-$	$-(\text{CH}_2)_k\text{SO}_2-$
$-\text{SO}_2\text{NR}_1'(\text{CH}_2)_k\text{O}(\text{CH}_2)_{k'}-$	$-\text{SO}_2\text{NR}_1'(\text{CH}_2)_k-$
$-(\text{CH}_2)_k\text{O}(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$	$-(\text{CH}_2)_k\text{SO}_2\text{NR}_1'(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$
$-(\text{CH}_2)_k\text{SO}_2(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$	$-\text{CONR}_1'(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$
$-(\text{CH}_2)_k\text{S}(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$	$-\text{CH}_2\text{CH}(\text{OR}_2')\text{CH}_2\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$
$-\text{SO}_2\text{NR}_1'(\text{CH}_2)_k\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$	$-(\text{CH}_2)_k\text{O}(\text{CH}_2)_{k'}-$
$-\text{OC}(\text{O})\text{NR}'(\text{CH}_2)_k-$	$-(\text{CH}_2)_k\text{NR}_1'-$
$-\text{C}_k\text{H}_{2k}-\text{OC}(\text{O})\text{NH}-$	$-\text{C}_k\text{H}_{2k}-\text{NR}_1'\text{C}(\text{O})\text{NH}(\text{CH}_2)_{k'}-$
$-(\text{CH}_2)_k\text{NR}_1'\text{C}(\text{O})\text{O}(\text{CH}_2)_{k'}-$, and	$-(\text{CH}_2)_k-$

Preferred linking groups $\dot{\text{Q}}$ are $-\text{C}(\text{O})\text{NH}(\text{CH}_2)_2-$ and $-\text{OC}(\text{O})\text{NH}(\text{CH}_2)_2-$.

Conveniently, the compounds of formula I used, generally have an average molecular weight of at least about 650, and preferably, at least about 1000. It will be understood, with respect to the description of formula I, that the composition comprises mixtures of compounds and therefore mixtures of molecular weights.

Examples of preferred fluorinated disilanes include, but are not limited to, the following approximate average structures:

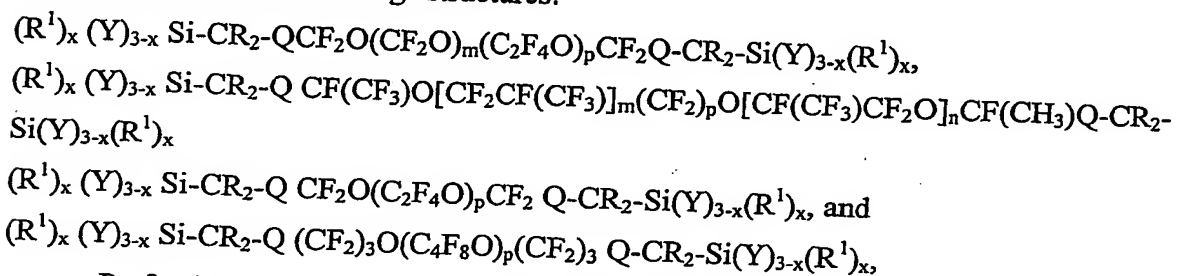


Preferably, in each fluorinated polyether silane, Q contains a nitrogen atom. More preferably, at least one $\text{Q}-\text{CR}_2-\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x$ group per molecule is $-\text{C}(\text{O})\text{NH}(\text{CH}_2)_3\text{Si}(\text{OR})_3$ or $-\text{OC}(\text{O})\text{NH}(\text{CH}_2)_3\text{Si}(\text{OR})_3$ (wherein R is methyl, ethyl, polyethyleneoxy or mixtures thereof).

The compounds of formula (I) can be synthesized using standard techniques. For example, commercially available or readily synthesized perfluoropolyether esters (or function derivative thereof) can be combined with a functionalized alkoxysilane, such as a 3-aminopropylalkoxysilane, according to US-A-3,810,874 (Mitsch et al.). It will be understood that functional groups other than esters may be used with equal facility to incorporate silane groups into a perfluoropolyether.




In accordance with a particular embodiment of the present invention, such perfluoropolyether diesters may be prepared through direct fluorination of a hydrocarbon polyether diester. Direct fluorination involves contacting the hydrocarbon polyether diester with F_2 . Accordingly, the hydrogen atoms on the hydrocarbon polyether diester will be replaced with fluorine atoms thereby generally resulting in the corresponding perfluoropolyether diester. Direct fluorination methods are disclosed in, for example, US Patent Nos. 5,578,278 and 5,658,962, which are incorporated herein by reference.

Examples of intermediates suitable for use in the preparation of fluorochemical polyether silanes may be represented by the general formula R_f-X_z , wherein R_f is as previously defined for Formula I and z is 2, 3 or 4. A particularly useful intermediate may be represented by the general formula




where n is in the range of 1 to 6, and preferably in the range of 1 to 3; n' is in the range of 5 to 12, and preferably in the range of 5 to 7, X is selected from the group consisting of $-COOH$, $-COOM_{1/v}$, $-COONH_4$, $-COOR$, $-CH_2OH$, $-COF$, $-COCl$, $-COR$, $CONR'R'$, $-CH_2NH_2$, $-CH_2NCO$, $-CN$, $-CH_2OSO_2R$, $-CH_2OCOR$, $-OC(O)CH_3$, $-CH_2OCOCR'=CH_2$, $-CONH(CH_2)_mSi(OR)_3$, and $-CH_2O(CH_2)_mSi(OR)_3$; where M is a metal atom having a valence " v " of 1 to 4, each R is independently selected from the group consisting of alkyl groups having from 1 to 14 carbon atoms, fluoroalkyl groups having from 1 to 14 carbon atoms, aryl groups having from 6 to 10 ring-carbon atoms, and heteroatom-containing groups having from 1 to 14 carbon atoms, and m is an integer in the range from 1 to 11; R' is independently H or R with the proviso R' is not a fluoroalkyl group.


Specific structures are exemplified by:

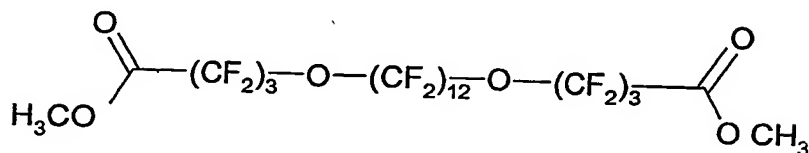

5




and

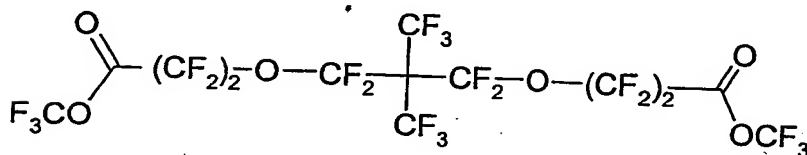

It will be understood with respect to the above novel structures, that other functional groups may be substituted for those depicted. For examples, the $-\text{CO}_2\text{H}$ group may be substituted by $-\text{COOM}_{1/v}$, $-\text{COONH}_4$, $-\text{COOR}$, $-\text{CH}_2\text{OH}$, $-\text{COF}$, $-\text{COCl}$, $-\text{COR}$, $\text{CONR}'\text{R}'$, $-\text{CH}_2\text{NH}_2$, $-\text{CH}_2\text{NCO}$, $-\text{CN}$, $-\text{CH}_2\text{OSO}_2\text{R}$, $-\text{CH}_2\text{OCOR}$, $-\text{OC}(\text{O})\text{CH}_3$, $-\text{CH}_2\text{OCOCR}'=\text{CH}_2$, $-\text{CONH}(\text{CH}_2)_m\text{Si}(\text{OR})_3$, and $-\text{CH}_2\text{O}(\text{CH}_2)_m\text{Si}(\text{OR})_3$ as previously described.


An additional embodiment is a composition comprising



where n is in the range of 1 to 6, and preferably in the range of 1 to 3; $\text{C}_{n'}\text{F}_{2n'-2}$ represents a cycloalkylene moiety where n' is in the range of 5 to 12, and preferably in the range of 6 to 8, X is selected from the group consisting of $-\text{COOH}$, $-\text{COOM}_{1/v}$, $-\text{COONH}_4$, $-\text{COOR}$,

-CH₂OH, -COF, -COCl, -COR', CONR'R', -CH₂NH₂, -CH₂NCO, -CN, -CH₂OSO₂R,
 -CH₂OCOR, -OC(O)CH₃, -CH₂OCOCR'=CH₂, -CONH(CH₂)_mSi(OR)₃,
 -CH₂O(CH₂)_mSi(OR)₃; where M is a metal atom having a valence "v" of 1 to 4, each R is
 5 independently selected from the group consisting of alkyl groups having from 1 to 14
 carbon atoms, fluoroalkyl groups having from 1 to 14 carbon atoms, aryl groups having
 from 6 to 10 ring-carbon atoms, and heteroatom-containing groups having from 1 to 14
 carbon atoms, q is 0 or 1, and m is an integer in the range from 1 to 11; R' is
 independently H or R with the proviso R' is not a fluoroalkyl group.

Specific perfluorinated cycloalkylene-containing structures are exemplified by:

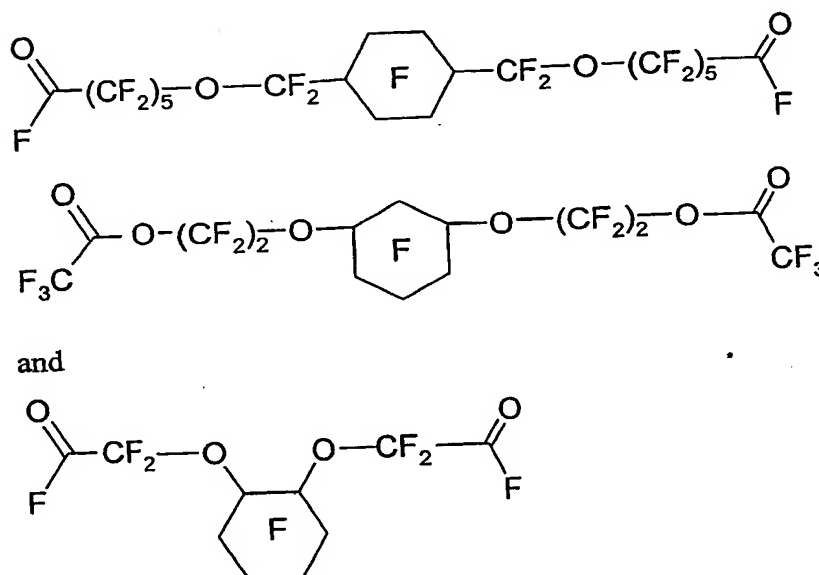


15 In an alternative method, perfluoropolyetherdiols can be reacted with a
 functionalized alkoxy silane, such as 3-trimethoxysilylpropylisocyanate. Modifications of
 this method are described in the Examples. Such materials may or may not need to be
 purified before use in a treatment composition.

20 In the present invention, mixtures of compounds (A) and/or (B) may be used.

Component (B) as used in the present invention comprises one or more non-
 fluorinated compounds of an element M selected from the group consisting of Si, Ti, Zr,
 B, Al, Ge, V, Pb, Sn and Zn having at least two hydrolysable groups per molecule.
 Preferably, the hydrolysable groups are directly bonded to the element M.

In one embodiment of the present invention, component (B) comprises a compound according to the formula (II)



wherein R^2 represents a non-hydrolysable group, M represents an element of valency $p+q$, selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn, p is 3 or 4 depending on the valence of M, q is 0, 1 or 2, and Y^1 represents a hydrolysable group.

The hydrolysable groups present in component (B) may be the same or different and are generally capable of hydrolyzing under appropriate conditions, for example under acidic or basic aqueous conditions, such that component (B) can undergo condensation reactions. Preferably, the hydrolysable groups upon hydrolysis yield groups capable of undergoing condensation reactions, such as hydroxyl groups.

Typical and preferred examples of hydrolysable groups include those as described with respect to component (A). Preferably, component (B) includes tetra-, tri- or dialkoxy (preferably containing 1 to 4 carbon atoms) compounds.

The non-hydrolysable groups R^2 may be the same or different and are generally not capable of hydrolyzing under the conditions listed above. For example, the non-hydrolysable groups R^2 may be independently selected from a hydrocarbon group, for example a C_1 - C_{30} alkyl group, which may be straight chained or branched and may include one or more aliphatic, cyclic hydrocarbon structures, a C_6 - C_{30} aryl group (optionally substituted by one or more substituents selected from halogens and C_1 - C_4 alkyl groups), or a C_7 - C_{30} aralkyl group.

In one embodiment the non-hydrolysable groups R^2 are independently selected from a hydrocarbon group, for example a C_1 - C_{30} alkyl group and a C_6 - C_{20} aryl group (optionally substituted by one or more substituents selected from halogens and C_1 - C_4 alkyl groups).

Preferred compounds (B) include those in which M is Ti, Zr, Si and Al. Representative examples of component (B) include tetramethoxysilane, tetraethoxysilane, methyl triethoxysilane, dimethyldiethoxysilane, octadecyltriethoxysilane, methyl trichlorosilane, tetra-methyl orthotitanate, tetraethyl orthotitanate, tetra-iso-propyl orthotitanate, tetra-n-propyl orthotitanate, tetraethyl zirconate, tetra-iso-propyl zirconate, tetra-n-propyl zirconate and the like. More preferred compounds include C_1 - C_4 alkoxy


derivatives of Si, Ti and Zr. Particularly preferred compounds (B) include tetraethoxysilane. Single compounds or mixtures of compounds (B) may be used.

Optionally, the composition may comprise one or more crosslinking agents (C), in order to further increase the durability of the coating. Component (C) may be selected from compounds with additional functionality from those of components (A) and (B). For example, component (C) may comprise a compound of an element M^1 that is selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn having at least one hydrolysable group and at least one reactive functional group per molecule that is capable of engaging in a crosslinking reaction. Preferably, said at least one hydrolysable group is directly bonded to the element M^1 .

Suitable and preferred hydrolysable groups include those groups mentioned with respect to component (A). If component (C) includes more than one hydrolysable groups, these may be the same or different. Particularly preferred hydrolysable groups are selected from C_1 - C_4 alkoxy groups, such as methoxy, ethoxy, iso- and (preferably) n-propoxy, or iso- and (preferably) n-butoxy groups.

The reactive functional group is a group which is capable of engaging in a crosslinking reaction so as to provide further crosslinking functionality to the polycondensation product that can be obtained from components (A), (B) and (C). The crosslinking reaction may involve for example irradiation, heating or a combination thereof. If component (C) includes more than one reactive functional groups, these groups may be the same or different. Of these, free radically polymerizable groups, such as vinyl, acrylate or methacrylate groups, are particularly preferred reactive functional groups.

A preferred crosslinking agent can be represented by formula (IV) :



wherein

L represents a reactive functional group that may react by condensation or addition reactions such as an amino group, an epoxy group, a mercaptan or an anhydride group or by free-radical polymerization; and

Q, Y and R^1 are as described for formula I, and x is 0, 1 or 2.

For formula V, preferably Q is an alkylene (preferably containing 1 to 10, more preferably containing 1 to 6 carbon atoms), an arylene (preferably containing 6 to 20 carbon atoms which may be substituted by one or more C_1 - C_4 alkyl groups, halogen atoms

or mixtures thereof), an oxyalkylene group of the formula $(-O-R-)_n$, wherein R is independently selected from a divalent, straight chained or branched lower alkyl group (preferably containing 1 to 6 carbon atoms) and n is an integer from 1 to 20.

For formula IV, preferably R^1 independently represents an alkyl group, preferably a C_1 - C_8 alkyl group (such as methyl, ethyl or propyl) or an C_1 - C_8 alkyl group containing a cyclic hydrocarbon structure (such as cycloalkyl such as cyclohexyl or cyclopentyl), an aryl group (preferably containing 6 to 20 carbon atoms which may optionally be substituted by one or more C_1 - C_4 alkyl groups or halogens or mixtures thereof, such as phenyl), an alkylaryl group (preferably containing 7 to 12 carbon atoms) or an aralkyl group (preferably containing 7 to 12 carbon atoms).

For formula IV, Y is hydrolysable group. Suitable and preferred examples of hydrolysable groups include those groups as mentioned with respect to component (A), formula I. Particularly preferred hydrolysable groups include alkoxy groups (preferably containing 1 to 4 carbon atoms), such as methoxy and ethoxy groups.

Particularly preferred reactive compounds according to formula (IV), in which the reactive functional group L is one that reacts by addition or condensation reactions, include epoxypropyltrimethoxysilane, bis(3-aminopropyltrimethoxysilyl)amine and aminopropyltrimethoxysilane.

Alternatively L may be a reactive functional group that is a free radically polymerizable group that typically contains an ethylenically unsaturated group capable of undergoing a free radical polymerization. Suitable free radically polymerizable groups L include, for example, moieties derived from vinyl ethers, vinyl esters, allyl esters, vinyl ketones, styrene, vinyl amide, acrylamides, maleates, fumarates, acrylates and methacrylates. Of these, the esters and amides of alpha, beta unsaturated acids, such as the acrylates and methacrylates are preferred.

Where L is a free radically polymerizable group the organic divalent linking group Q may contain from 1 to about 20, preferably from 1 to 10 carbon atoms. Q can optionally contain oxygen, nitrogen, or sulfur-containing groups or a combination thereof. Examples of suitable linking groups Q include straight chain, branched chain or cyclic alkylene (preferably containing 2 to 20 carbon atoms), arylene (preferably containing 6 to 20 carbon atoms), aralkylene (preferably containing 7 to 20 carbon atoms), oxyalkylene,

carbonyloxyalkylene, oxycarboxyalkylene, carboxyamidoalkylene, urethanealkylene, ureylenealkylene and combinations thereof.

Preferred linking groups Q for Formula IV are selected from the group consisting of alkylene (preferably containing 2 to 20, more preferably 2 to 10 carbon atoms), oxyalkylene (preferably containing 2 to 20 carbon atoms and 1 to 10 oxygen atoms) and carbonyloxyalkylene (preferably containing 3 to 20 carbon atoms).

Examples of compounds according to formula (IV), wherein L is a free radically polymerizable group include vinyltrichlorosilane, vinyltrimethoxysilane, vinyltriethoxysilane and alkoxyalkylene functionalised acrylates or methacrylates, such as methacryloyloxypropyl trimethoxysilane.

The presence of such reactive functional groups, preferably reactive unsaturated groups in the corresponding polycondensates is advantageous in that following the coating of the composition onto a substrate a two-fold curing can be carried out, i.e. a thermal or photochemically induced linking of the unsaturated organic radicals through radical polymerization and a thermal completion of the polycondensation (e.g. by elimination of water from groups M-OH still present). In the case an unsaturated compound is used, additionally a catalyst should typically be present for the thermal and/or photochemically induced curing of the coating composition applied onto a suitable substrate. Particularly preferred is the addition of a photopolymerization initiator. Such initiators are commercially available and include e.g. Irgacure® 184 (1-hydroxycyclohexyl phenyl ketone), Irgacure®500 (1-hydroxycyclohexyl phenyl ketone, benzophenone), and other photo-initiators of the Irgacure®-type available from Ciba-Geigy ; Darocur®-type photo-initiators, available from Merck, benzophenone and the like.

Examples of optionally employed thermal initiators are known to those skilled in the art and include, among others, organic peroxides in the form of diacyl peroxides, peroxydicarbonates, alkyl peresters, dialkyl peroxides, perketals, ketone peroxides and alkyl hydroperoxides. Specific examples of such thermal initiators are dibenzoyl peroxide, tert-butyl perbenzoate and azobisisobutyronitrile. These initiators are added to the coating composition in amounts known to one skilled in the art. Typically the initiator will be added in an amount between 0.1 and 2% by weight, based on the amount of crosslinking agent..

5 The compositions may further contain additives that provide the coating with additional properties, such as antimicrobial properties. Examples include $[C_{18}H_{37}N(CH_3)_2(CH_2)_3Si(OCH_3)_3]^+Cl^-$. However, the addition of ionic additives is preferably kept below about 10% by weight, in order not to adversely affect the water repellency properties of the composition.

The reaction product comprised in the composition of the present invention is obtainable by reacting components (A), (B), and optionally (C). Typically, the reaction product is a polycondensation product. Suitable reacting steps include at least partially condensation.

10 The polycondensation reaction is conveniently carried out by mixing the starting components in an organic solvent preferably at room temperature, in the presence of sufficient water to effect hydrolysis of the hydrolysable groups. Preferably, the amount of water will be between 0.1 and 20 % by weight of the total composition, more preferably between 1 and 10% by weight. In addition to water, an organic or inorganic acid or base catalyst should preferably be used.

15 It is preferred that the weight ratio of compounds (A) to compounds (B) in the preparation of the reaction product is 1:1 to 1:20 and particularly preferred 1:1 to 1:10. The composition to prepare the reaction product comprises a substantial amount of component (B), i.e. an amount greater than a catalytic amount. Typically, component (B) comprises more than 10 weight percent and more preferably more than 25 weight percent based on the total weight of the components used. In a particularly preferred embodiment, component (B) comprises more than 50 weight percent based on the total weight of the components used. Compound (C) can be used between 0 and 50%, preferably between 0 and 35% by weight, based on the total weight of the components used.

25 While the benefits of reacting components A and B (optionally with C) extend over a wide range of compositions, good initial repellency is achieved for coatings despite relatively low levels of the fluorochemical polyether silane (component A) involved in producing the reaction product. Therefore a preferred composition of this invention comprises the relatively expensive fluorosilane at 5-20% wt.%, giving an economic advantage to the compositions of this invention over other fluorinated coatings. Additionally, compositions obtained from 5-20 wt. % component A were quite surprisingly more durable in maintaining repellency after abrasion of a coated surface.

5 A homogeneous reaction mixture can be obtained by mixing the components in solvent, in the presence of water, and optionally an acid or base catalyst. In particular, there is no need for a two step reaction, where in a first step a precondensate of compound (B) is formed and in a second step, the fluorochemical polyether disilane is added. Upon mixing, a homogenous mixture is obtained wherein substantially no phase separation occurs.

10 Organic acid catalysts include acetic acid, citric acid, formic acid, triflic acid, perfluorobutyric acid and the like. Examples of inorganic acids include sulphuric acid, hydrochloric acid and the like. Examples of useful base catalysts include sodium hydroxide, potassium hydroxide and triethylamine. The acid or base catalyst will generally be used in amounts between about 0.01 and 10%, more preferably between 0.05 and 5% by weight of the total composition.

15 The composition of the present invention may include one or more organic solvents. The organic solvent or blend of organic solvents used must be capable of dissolving a mixture of compounds (A), (B) and optionally (C) and the fluorinated polycondensate formed after reaction. Preferably, the organic solvent or blend of organic solvents used is capable of dissolving at least 0.01% of the fluorochemical polycondensate. Furthermore, the solvent or mixture of solvents preferably has a solubility for water of at least 0.1%, preferably 1% by weight and a solubility for the acid or base catalyst of at least 0.01%, preferably 0.1% by weight. If the organic solvent or mixture of
20 organic solvents do not meet these criteria, it may not be possible to obtain a homogeneous mixture of the fluorinated polycondensate, solvent(s), water and catalyst.

25 Suitable organic solvents, or mixtures of solvents can be selected from aliphatic alcohols (preferably containing 1 to 6 carbon atoms), such as methanol, ethanol, isopropylalcohol ; ketones such as acetone or methyl ethyl ketone ; esters, such as ethyl acetate, methylformate and ethers, such as diethyl ether. Particularly preferred solvents include ethanol and acetone.

30 Fluorinated solvents may be used in combination with the organic solvents in order to improve solubility of the starting compounds and/or the fluorochemical polycondensate. Such fluorinated solvents will generally not be suitable for use on their own because they will generally not meet the requirements of solubility for water and acid or base unless they additionally contain hydrophilic groups such as $\text{CF}_3\text{CH}_2\text{OH}$.

Examples of fluorinated solvents include fluorinated hydrocarbons, such as perfluorohexane or perfluorooctane, available from 3M; partially fluorinated hydrocarbons, such as pentafluorobutane, available from Solvay, or $\text{CF}_3\text{CFHCFHCF}_2\text{CF}_3$, available from DuPont; hydrofluoroethers, such as methyl perfluorobutyl ether or ethyl perfluorobutyl ether, available from 3M. Various blends of these materials with organic solvents can be used.

It will further be appreciated by one skilled in the art that the preparation of fluorochemical polycondensates according to the present invention results in a mixture of compounds. A condensation sequence is described by Arkles (CHEMTECH (1977), v. 7 pp 766-78).

The composition comprising the fluorinated polycondensates of the present invention is generally applied to the substrate in amounts sufficient to produce a coating that is water and oil repellent. This coating can be extremely thin, e.g. 1 to 50 molecular layers, though in practice a useful coating may be thicker.

Suitable substrates that can be treated in a particularly effective way with the fluorinated polycondensate mixture of this invention include substrates having a hard surface that preferably has groups capable of reacting with the fluorinated polycondensate. Particularly preferred substrates include ceramics, glass, metal, natural and man-made stone, polymeric materials (such as poly(meth)acrylate, polycarbonate, polystyrene, styrene copolymers, such as styrene acrylonitrile copolymers, polyesters, polyethylene terephthalate), paints (such as those on acrylic resins), powder coatings (such as polyurethane or hybrid powder coatings), and wood. Various articles can be effectively treated with the fluorochemical solution of the present invention to provide a water and oil repellent coating thereon. Examples include ceramic tiles, bathtubs or toilets, glass shower panels, construction glass, various parts of a vehicle (such as the mirror or windscreen), glass, and ceramic or enamel pottery materials.

Treatment of the substrates results in rendering the treated surfaces less retentive of soil and more readily cleanable due to the oil and water repellent nature of the treated surfaces. These desirable properties are maintained despite extended exposure or use and repeated cleanings because of the high degree of durability of the treated surface as can be obtained through the compositions of this invention.

To effect the treatment of a substrate, the fluorochemical polycondensate, preferably in the form of a solvent composition as disclosed above, is applied to the substrate. The amount of fluorochemical polycondensate to be coated on the substrate will generally be that amount sufficient to produce a coating which is water and oil repellent, such a coating having at 20°C a contact angle with distilled water of at least 80°, and a
5 contact angle with n-hexadecane of at least 40°, measured after drying and curing of the coating.

Preferably, the substrate should be clean prior to applying the compositions of the invention so as to obtain optimum characteristics, particularly durability. That is, the
10 surface of the substrate to be coated should be substantially free of organic contamination prior to coating. Cleaning techniques depend on the type of substrate and include, for example, a solvent washing step with an organic solvent, such as acetone or ethanol.

The coating composition is typically a relatively diluted solution, containing between 0.01 and 5 percent by weight of the fluorochemical polycondensate, more
15 preferably, between 0.03 and 3 percent by weight of the fluorochemical polycondensate, and most preferably, between 0.05 and 2 percent by weight of the fluorochemical polycondensate. In accordance with a preferred embodiment, compositions for application to a substrate are prepared by diluting a concentrate comprising a solution of at least 25% by weight of a fluorochemical polycondensate in an organic solvent, by adding to the
20 concentrate an organic solvent or mixture of solvents.

A wide variety of coating methods can be used to apply a composition of the present invention, such as brushing, spraying, dipping, rolling, spreading, and the like. A preferred coating method for application of a fluorochemical polycondensate of the present invention includes spray application. A substrate to be coated can typically be
25 contacted with the treating composition at room temperature (typically, about 20°C to about 25°C). Alternatively, the mixture can be applied to substrates that are preheated at a temperature of for example between 60°C and 150°C. This is of particular interest for industrial production, where e.g. ceramic tiles can be treated immediately after the baking oven at the end of the production line. Following application, the treated substrate can be
30 dried and cured at ambient or elevated temperature, e.g. at 40° to 300°C and for a time sufficient to dry and cure. Alternatively, in addition with a thermal treatment, the coating composition may be cured by irradiation (e.g. by means of UV-irradiators, a laser, etc.) in

a manner known per se, depending on the type and presence, respectively of an initiator. The process may also require a polishing step to remove excess material.

Preferably, the obtained coating on the substrate is cured, generally at an elevated temperature of 40 to 300°C. This curing step can be done at the beginning (application of the composition to a hot substrate) or at the end of the application process. In an alternative method, the coating can be cured by photochemical activation of materials represented in formula (IV).

The following examples further illustrate the invention without the intention however to limit the invention thereto. All parts are by weight unless indicated otherwise.

1. Synthesis of fluorinated polyether disilanes

A. Fluoropolyetherdisilane FES-1:

FES-1 was prepared by reacting perfluoropolyetherdiester $\text{CH}_3\text{OC}(\text{O})\text{CF}_2\text{O}(\text{CF}_2\text{O})_{9-11}(\text{CF}_2\text{CF}_2\text{O})_{9-11}\text{CF}_2\text{C}(\text{O})\text{OCH}_3$ (with average molecular weight of about 2000), commercially available from Ausimont, Italy, under the trade designation Fomblin™ Z-DEAL, with 3-aminopropyltrimethoxysilane, available from Aldrich Co., Milwaukee, WI, as taught in US 3,810,874 (Mitsch et al.), table 1, line 6. The exothermic reaction proceeded readily at room temperature, simply by mixing the starting materials. The progress of the reaction was monitored by infrared analysis.

B. Hexafluoropropyleneoxide diurethanedisilane FES-2:

FES-2 was prepared by reacting a perfluoropolyetherdiol $(\text{HOCH}_2\text{CF}(\text{CF}_3)\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_x(\text{CF}_2)_4\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_y\text{CF}(\text{CF}_3)\text{CH}_2\text{OH})$ (with average molecular weight of about 1300 ; $x+y$ is about 6-7) with two equivalents of 3-trimethoxysilylpropylisocyanate in ethylacetate, at 80°C during 16 hours under nitrogen atmosphere and in the presence of dibutyltindilaurate. After the reaction was completed, as indicated by IR-analysis, the ethylacetate was evaporated.

C. Preparation of FES-3:

FES-3 was prepared by reacting Fomblin Z-DEAL with 2 equivalents of bis(3-(trimethoxysilyl)propyl)amine, available from Aldrich, Milwaukee, WI as described in US Pat. No. 3,810,874. The reaction was performed under nitrogen atmosphere at 80°C for 6 hrs. Reaction progress reaction was monitored by IR analysis.

D. Preparation of FES-4:

FES-4 was prepared by reacting a mixture of HFPO-oligomers with formula $\text{CF}_3\text{CF}_2\text{CF}_2\text{O}(\text{CF}(\text{CF}_3)\text{CF}_2\text{O})_n\text{CF}(\text{CF}_3)\text{COOCH}_3$ (with $n \sim 5$), with one equivalent of bis (3-(trimethoxysilyl)propyl)amine, available from Aldrich, Milwaukee, WI as described in US Pat. No.3,810,874. The reaction was carried out under nitrogen at 80°C for 6 hrs. Reaction progress was monitored by gas chromatographic analysis.

2. Synthesis of fluorochemical polycondensate FESG-1

Several fluorochemical polycondensates as given in table 1 were prepared similar to the synthesis of FESG-1:

In a three-necked flask of 250 ml, fitted with a condenser, stirrer and thermometer, were placed 10 g of FES-1, 10 g TEOS (tetraethoxysilane; available from Aldrich Co., Milwaukee, WI), 20 g ethanol, 2.0 g DI-H₂O and 1.0 g acetic acid. The clear mixture was stirred at room temperature for 16 hrs. Conversion of alkoxy silane groups was determined, after solvent evaporation, using infrared and C¹³-NMR analysis. Conversion was about 96%. The slightly hazy reaction mixture was then diluted to 0.1% fluorochemical solids in ethanol.

The preparation of the fluorochemical polycondensates FESG-5 and FESG-8 were prepared in a similar manner to that noted above with the exception that 0.1 g of DI-H₂O was added instead of 2.0 g of DI-H₂O.

Table 1:
Composition of fluorochemical polycondensates

FESG	Compounds	Weight ratio
FESG-1	FES-1/TEOS	1/1
FESG-2	FES-1/TEOS/Octadecyltrimethoxysilane	2/2/1
FESG-3	FES-1/TEOS/aminopropyltrimethoxysilane	2/2/1
FESG-4	FES-1/TEOS/C ₁₈ H ₃₇ N ⁺ (CH ₃) ₂ (CH ₂) ₃ Si(OCH ₃) ₃ Cl ⁻	10/10/1
FESG-5	FES-1/tetraethoxyzirconate	1/1
FESG-6	FES-1/TEOS/aminopropyltrimethoxysilane	1/1/1
FESG-7	FES-1/TEOS	1/10
FESG-8	FES-1/tetraisopropoxytitanate	1/1
FESG-9	FES-2/TEOS	1/1
FESG-10	FES-2/TEOS/epoxypropyltrimethoxysilane	2/2/1
FESG-11	FES-3/TEOS	1/1
FESG-12	FES-4/TEOS	1/1

Substrates

5 The fluorochemical polycondensate mixtures according to the invention were tested on various substrates as given below :

<u>Substrate</u>	<u>Supplier</u>
White glazed wall tiles	Villeroy and Boch, Germany
Polymethylmethacrylate (PMMA) sheet	NUDEC, Spain
Linoleum	Forbo-Krommerie, Netherlands
Enamel plate	ROCA, Spain
Epoxy powder coating	Ruhr Pulverlack GmbH, Germany
Wood	BRICO, Belgium
Chromated steel	Ideal Standard, Germany

Methods of testing

Contact Angles

10 The treated substrates were tested for their contact angles versus water (W) and n-hexadecane (O) using an Olympus TGHM goniometer. The contact angles were measured before (initial) and directly after abrasion (abrasion), unless otherwise indicated. The values are the mean values of 4 measurements and are reported in degrees. The

minimum measurable value for a contact angle was 20. A value <20 meant that the liquid spread on the surface.

Abrasion Test

5 The treated substrates were abraded using an AATCC Crockmeter, 20 cycles using sandpaper nr. 600 (available from 3M). Alternatively, abrasion testing was accomplished using an Erichsen cleaning machine, 3M High Performance Cloth (available from 3M) and CIF cleaner (available from Lever), using 40 cycles.

Examples

Examples 1 to 12 and comparative examples C-1 to C-3

10 In examples 1 to 12, 0.1% fluorochemical polycondensate mixtures prepared according to the general procedure, were sprayed onto white Villeroy & Boch tiles, kept at room temperature, followed by curing at 150°C during 30 minutes. After cooling to 50°C, excess product was polished off with a paper wipe. Contact angles were measured before and after abrasion with an Erichsen cleaning machine. Comparative example C-1 was made with a mixture of a fluorochemical silane composition (according to GB 2 218 097, example 25) and TEOS in a weight ratio 1/1. Comparative example C-2 was made with a mixture of Ausimont MF 407, a perfluoropolyether monosilane, available from Ausimont and TEOS in a ratio weight 1/1. Comparative example C-3 was made with a mixture, prepared according to US 6,054,601, example 1. The results are given in table 2.

Table 2:

Contact angles of wall tiles treated with fluorochemical polycondensate mixtures.

Ex	Fluorochemical polycondensates	Contact angles (°)			
		Initial Water	Initial n-hexadecane	After abrasion Water	After abrasion n-hexadecane
1	FESG-1	108	65	90	52
2	FESG-2	102	58	85	45
3	FESG-3	109	58	95	54
4	FESG-4	98	57	85	45
5	FESG-5	104	63	85	54
6	FESG-6	105	60	85	47
7	FESG-7	105	60	92	55

8	FESG-8	100	60	85	52
9	FESG-9	106	62	80	45
10	FESG-10	103	60	85	47
11	FESG-11	105	65	90	50
12	FESG-12	100	58	80	45
C-1	GB 2 218097, ex 25/TEOS 1/1	100	65	58	32
C-2	MF407/TEOS 1/1	93	52	55	20
C-3	Example 1 in US 6,054,601	95	50	50	20

The results indicated that tiles with high oil- and water-repellency could be made by using fluorochemical polycondensate compositions according to the invention. High contact angles were measured, initially, but especially also after abrasion, indicating that highly durable coatings were made. To the contrary, the comparative examples did not meet the requirements for oil and/or water repellency after abrasion.

Examples 13 to 18

In examples 13 to 18, different substrates, which were kept at room temperature, were treated with FESG-1 by spray application. The treated substrates were dried at 80°C for 30 min. After cooling to 40°C, the excess product was polished off using a paper wipe. Abrasion test was done using the AATCC Crockmeter. The contact angles of untreated substrates were recorded as well as the contact angles of the treated substrates, before and after abrasion. The results are given in table 3.

Table 3:

Contact angles of substrates treated with fluorochemical polycondensate mixtures.

Ex	Substrate	Contact angles (°)					
		Untreated initial		FESG-1 initial		FESG-1 Abrasion	
		W	O	W	O	W	O
13	Linoleum	92	<20	120	60	108	55
14	PMMA	70	<20	90	60	78	45
15	Epoxy	65	<20	92	62	85	55
16	Wood	<20	<20	120	56	65	43

17	Enamel	40	<20	96	58	90	50
18	Chromated steel	72	<20	95	60	85	50

The results in table 3 show that the application of a 0.1% mixture of fluorochemical polycondensate, according to the invention, improved the water and oil repellency of the different substrates considerably. In all cases, high durability of the treatment was observed.

5

Claims:

1. A composition comprising the reaction product obtainable after a substantially complete condensation reaction of:

5 A. at least one fluorochemical polyether silane compound having a polyfluoropolyether segment and at least two silane groups $-\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x$ per molecule,

wherein R^1 represents an alkyl group, Y represents a hydrolysable group and x is 0 or 1; and

10 B. a substantial amount of one or more non-fluorinated compounds of an element M selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn and having at least two hydrolysable groups per molecule.

2. A composition according to claim 1 wherein said fluorochemical polyether silane compound (A) corresponds to the formula:

15
$$\text{R}_f[\text{Q}-\text{CR}_2-\text{Si}(\text{Y})_{3-x}(\text{R}^1)_x]_z$$

wherein R_f represents a multivalent polyfluoropolyether segment, Q represents an organic divalent linking group, R^1 represents a C_1 - C_8 alkyl group, Y represents a hydrolysable group, R represents hydrogen or an alkyl group of 1 to 4 carbon atoms whereby the R groups may be the same or different, z is 2, 3 or 4 and x is 0 or 1.

20 3. A composition according to claim 1 wherein said component (B) is a compound according to the formula:



25 wherein R^2 represents a non-hydrolysable group, M represents an element selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn, p is 3 or 4 depending on the valence of M, q is 0, 1 or 2, and Y^1 represents a hydrolysable group.

30 4. A composition according to claim 1 wherein said reaction product is a reaction product obtainable from a substantially complete condensation reaction of said components (A) and (B) and further a crosslinking agent (C).

5. A composition according to claim 4 wherein the crosslinking agent (C) is a compound of an element M^1 that is selected from the group consisting of Si, Ti, Zr, B, Al, Ge, V, Pb, Sn and Zn, said crosslinking agent (C) further having at least one hydrolysable group and at least one reactive functional group per molecule that is capable of engaging in a crosslinking reaction.
6. The composition according to claim 1, wherein the hydrolysable groups in components (A) and (B) may be the same or different and are independently selected from a halide group, an alkoxy group, an acyloxy group, an aryloxy group or a polyoxyalkylene group.
7. The composition according to claim 1, wherein the polyfluoropolyether segment includes perfluorinated repeating units selected from the group consisting of $-(C_nF_{2n}O)-$, $-(CF(Z)O)-$, $-(CF(Z)C_nF_{2n}O)-$, $-(C_nF_{2n}CF(Z)O)-$, $-(CF_2CF(Z)O)-$, and combinations thereof, wherein Z is a perfluoroalkyl group, an oxygen-substituted perfluoroalkyl group, a perfluoroalkoxy group, or an oxygen-substituted perfluoroalkoxy group, all of which can be linear, branched, or cyclic, and have 1 to 9 carbon atoms and 0 to 4 oxygen atoms and wherein n is a number from 1 to 12 inclusive.
8. The composition according to claim 1, wherein the weight ratio of component (A) to component (B) is 1:1 to 1:20.
9. A coating composition comprising 0.01 to 5 weight percent of the composition of claim 1 and an organic solvent.
10. A coated substrate comprising a coating derivable from the composition of claim 1.
11. Process for the preparation of a perfluoropolyether condensation product, the process comprising the steps of admixing components (A), (B), and optionally (C) of claim 5; and reacting the components until substantial completion of the reaction is detected.

12. Process according to claim 11 wherein said components (A), (B) and optionally (C) are further admixed with water and an acid or base catalyst.

5 13. Method of treating a substrate, comprising the steps of coating at least part of the surface of said substrate with a coating composition as defined in claim 1.

14. Method according to claim 13 wherein said substrate is glass, ceramic, metal or a polymeric substrate.

10 15. Method according to claim 13 wherein said method further involves the step of subjecting the coated substrate to an elevated temperature in the range of 40 to 400°C.

INTERNATIONAL SEARCH REPORT

In Application No
PCT/US 02/27331

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C08G65/00 C08G65/336 C09D171/02 C03C17/30 C08J7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C08G C09D C03C C09K C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EPO-Internal, PAJ

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 1 059 320 A (SHINETSU CHEMICAL CO) 13 December 2000 (2000-12-13) page 1, line 3 - line 6 page 3, line 17 - line 45 page 4, line 13 - line 29 page 5, line 2 - line 25 claims; examples	1-15
X	EP 0 844 265 A (DAIKIN IND LTD) 27 May 1998 (1998-05-27) page 1, line 5 - line 9 page 4, line 44 - page 6, line 24 page 9, line 1 - page 10, line 17 page 11, line 32 - page 12, line 40; claims; examples	1-15

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *G* document member of the same patent family

Date of the actual completion of the international search

22 November 2002

Date of mailing of the international search report

06/12/2002

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Masson, P

INTERNATIONAL SEARCH REPORT

In Application No
PCT/US 02/27331

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 99 37720 A (MINNESOTA MINING & MFG) 29 July 1999 (1999-07-29) the whole document	1-15
X	US 5 919 886 A (SAKAMOTO TAKAFUMI ET AL) 6 July 1999 (1999-07-06) cited in the application column 2, line 50 - line 63 column 3, line 4 - line 47 column 5, line 7 - column 8, line 60 column 11, line 17 - line 37 column 12, line 3 - column 13, line 17; claims; examples	1-8
P, X	WO 02 30848 A (3M INNOVATIVE PROPERTIES CO) 18 April 2002 (2002-04-18) example 42	1-15
X	US 5 274 159 A (PELLERITE MARK J ET AL) 28 December 1993 (1993-12-28) column 1, line 7 - line 12 column 2, line 65 - column 3, line 27 column 4, line 12 - column 5, line 36 column 8, line 45 - column 9, line 7 claims; examples 7, 8	1-15
A	EP 0 978 524 A (DAIKIN IND LTD) 9 February 2000 (2000-02-09) the whole document	1-15
X	US 4 614 667 A (LARSON JAMES M ET AL) 30 September 1986 (1986-09-30) column 1, line 12 - line 17 column 2, line 51 - line 61 column 4, line 3 - column 8 column 9, line 22 - line 26 column 10, line 1 - line 4; claims	1-10, 12-15
A	WO 99 03941 A (GORE W L & ASS GMBH ; STEFFL RUDOLF (DE); KASEMANN REINER (DE); BUE) 28 January 1999 (1999-01-28) cited in the application the whole document	1-15
A	EP 0 937 748 A (SHINETSU CHEMICAL CO) 25 August 1999 (1999-08-25) the whole document	1-15
A	EP 0 738 771 A (SHINETSU CHEMICAL CO) 23 October 1996 (1996-10-23) cited in the application the whole document	1-15
	-/-	

INTERNATIONAL SEARCH REPORT

In — Application No
PCT/US 02/27331

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	<p>DATABASE WPI Week 9403 Derwent Publications Ltd., London, GB; AN 1994-023106 XP002222120 & JP 05 331455 A (SHINETSU CHEM IND CO LTD) abstract</p>	1-15
X	<p>& JP 05 331455 A 14 December 1993 (1993-12-14) '0005!', '0006!', '0014!', '0016!', '0018!', '0019!', '0020! examples 6,7</p>	1-15

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

 Int. Application No
 PCT/US 02/27331

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 1059320	A	13-12-2000	JP	2000327772 A	28-11-2000
			EP	1059320 A2	13-12-2000
			US	6200684 B1	13-03-2001
EP 0844265	A	27-05-1998	JP	2860979 B2	24-02-1999
			JP	9202648 A	05-08-1997
			JP	9194795 A	29-07-1997
			JP	9235142 A	09-09-1997
			EP	0844265 A1	27-05-1998
			US	6183872 B1	06-02-2001
			WO	9707155 A1	27-02-1997
			JP	9157582 A	17-06-1997
			JP	2874715 B2	24-03-1999
			JP	9157388 A	17-06-1997
			JP	9263728 A	07-10-1997
WO 9937720	A	29-07-1999	US	6277485 B1	21-08-2001
			AU	739635 B2	18-10-2001
			AU	7959398 A	09-08-1999
			CA	2317613 A1	29-07-1999
			CN	1284105 T	14-02-2001
			EP	1051448 A1	15-11-2000
			JP	2002506887 T	05-03-2002
			WO	9937720 A1	29-07-1999
US 5919886	A	06-07-1999	JP	3121245 B2	25-12-2000
			JP	9077777 A	25-03-1997
			JP	3232221 B2	26-11-2001
			JP	9077944 A	25-03-1997
			US	6020450 A	01-02-2000
			EP	0745604 A2	04-12-1996
			JP	3183624 B2	09-07-2001
			JP	9137027 A	27-05-1997
			US	5705591 A	06-01-1998
WO 0230848	A	18-04-2002	AU	1189002 A	22-04-2002
			WO	0230848 A1	18-04-2002
US 5274159	A	28-12-1993	AU	663241 B2	28-09-1995
			AU	5488794 A	25-08-1994
			CA	2113759 A1	19-08-1994
			EP	0611771 A1	24-08-1994
			JP	6296850 A	25-10-1994
EP 0978524	A	09-02-2000	EP	0978524 A1	09-02-2000
			US	6337135 B1	08-01-2002
			WO	9849218 A1	05-11-1998
US 4614667	A	30-09-1986	US	4567073 A	28-01-1986
WO 9903941	A	28-01-1999	DE	19730245 A1	21-01-1999
			AU	9065798 A	10-02-1999
			WO	9903941 A1	28-01-1999
			EP	0996691 A1	03-05-2000
			JP	2001510224 T	31-07-2001
			US	6361870 B1	26-03-2002
EP 0937748	A	25-08-1999	JP	11236509 A	31-08-1999

INTERNATIONAL SEARCH REPORT

Int'l Application No
PCT/US 02/27331

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
EP 0937748	A		EP 0937748 A2 US 6218499 B1	25-08-1999 17-04-2001
EP 0738771	A	23-10-1996	JP 3196621 B2 JP 9003403 A DE 69613623 D1 DE 69613623 T2 EP 0738771 A1 US 5739369 A	06-08-2001 07-01-1997 09-08-2001 08-05-2002 23-10-1996 14-04-1998
JP 5331455	A	14-12-1993	JP 2877616 B2	31-03-1999

Form PCT/ISA/210 (patent family annex) (July 1992)

This Page Blank (uspto)